


08

ELECTRICAL and LIGHTING

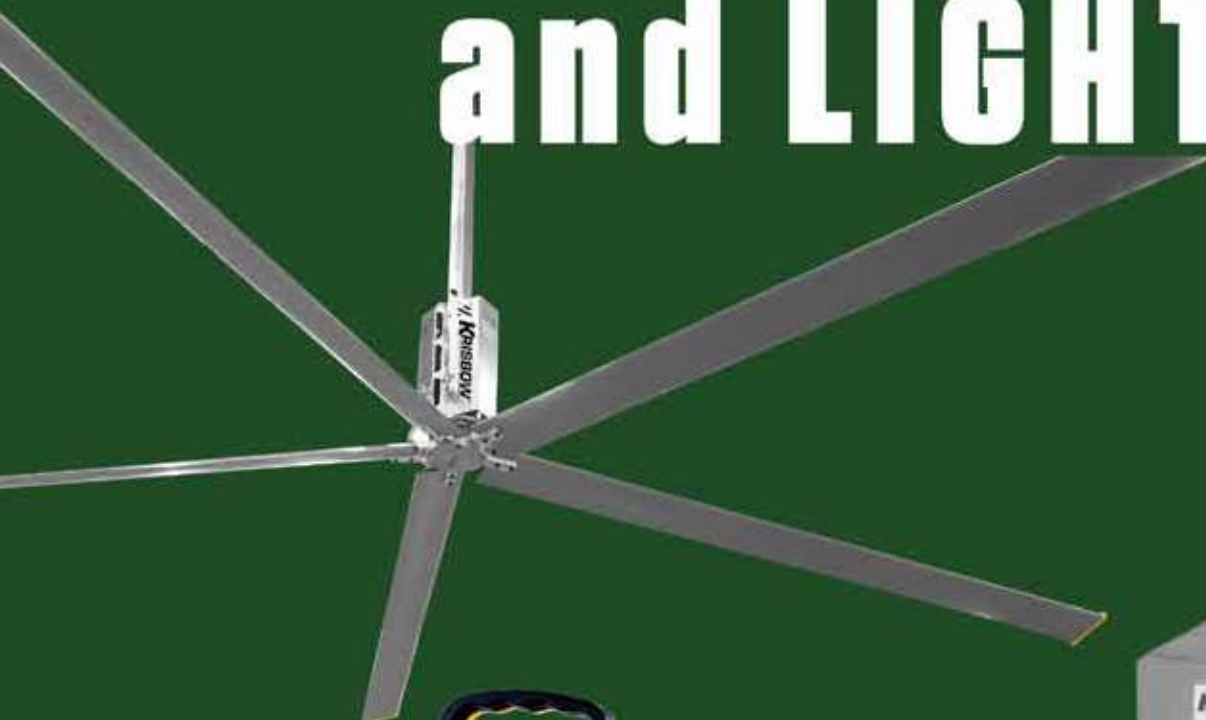

www.krisbow.com

HIGH VOLUME LOW SPEED FAN (HVLS)

Features :

- High quality material
- Quiet and efficient
- Super wide coverage area
- Natural breeze
- Easy to assemble



More powerful



Totally free of maintenance




High efficiency



Fewer noises



"Provide pleasant experience in cooling down from the sweet directly and violently. Feel absolutely comfortable and peaceful"

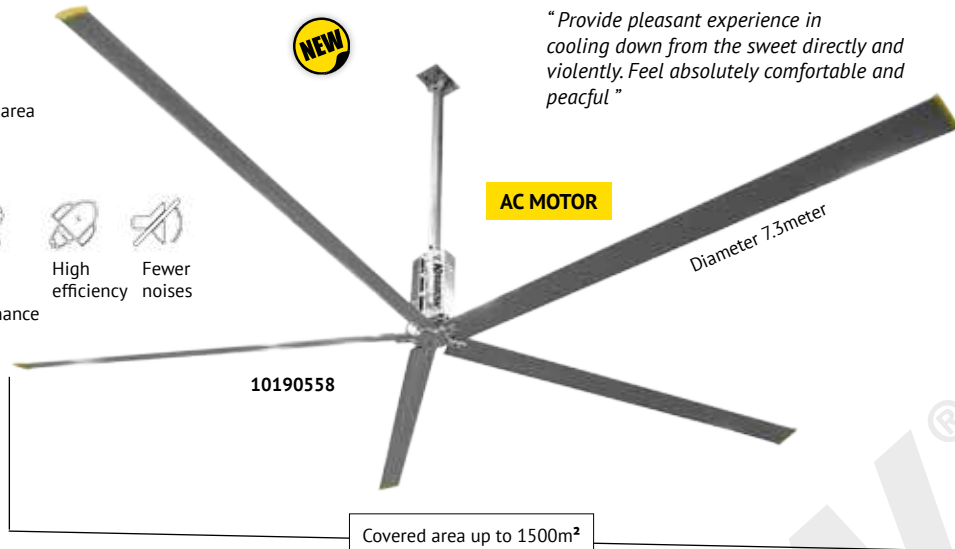

Control panel



Adopt Import Germany LENZE Gearmotor

Advantage compared with other brands :

Joint develop with Germany company for HVLS industry only ;

01.

Use low backlash assembly process and gear grinding technique, lower noise.



02.

Strengthen the bearing frame structure, increase oil seal and strengthen the motor structure with trapezoidal shaft structure, higher safety.

03.

7-Year market validation, stable quality and performance.

04.

Passed CCC, CE, UL certificates.


Hub hot forging technology



After forging, metal can improve its structure and mechanical properties. The hub made by 1500T heat forge, numerical control machining and CNC precise machining. Forging is able to confirm the consistency of metal structure, which can keep the inside structure and the outside shape of forged pieces consistent. Complete streamline structure of the metal confirms the best mechanical property of the hub and incomparable! By CNC machining, the precision tolerance has been controlled in 100um, which guarantees the precise dynamic balance of the hub.



Krisbow Airfoil Blades



Adopt imported special high strength aircraft grade magnesium, PVFD processed in surface, and aerodynamics fan blade design.

Magnalium : 5% Magnesium
95% Aluminum

Greater strength, greater corrosion resistance, and lower density than pure aluminum



Aerodynamics empennage



Prevent energy loss, fan will run steadily, which will bring economic effect

1. Safety guy wire: each steel wire can bear over 1000kg and with the joint being set up double protection.
2. Airfoil retainer: to reconnect all the fan blades and the hub as an integrated structure.
3. Fasteners: fastener enjoys the application of industrial bolt of 12.9 degree and the practical stress endure above 10 times.
4. Anti-off protective structure---safety ring, trapezoidal out shaft and reverse thread bolt: once accidents occur, the safety ring would prevent hub falling down.
5. VFD control system: Once the accidents occur, it would automatically alarm and stop the operation.

STOCK BY REQUEST

Article No.	10216693	10216582	10216583	10190558
Description	Industrial Ceiling Fan DIA. 3.65M 1500W	Industrial Ceiling Fan DIA. 4.9M 1500W	Industrial Ceiling Fan DIA. 6.1M 1500W	Industrial Ceiling Fan DIA. 7.3M 1500W
Specification				
Technical Specification	12ft (3.65m)	16ft (4.9m)	20ft (6.1m)	24ft (7.3 m)
Full Load	10350m ³ /min	11250m ³ /min	12150m ³ /min	13050m ³ /min
Speed Range	5-90 RPM	5-70 RPM	5-60 RPM	5-50 RPM
Weight of Fan's Main Structure	65 kg	80 kg	105 kg	120 kg
Maximum Motor Power	1.1 kW		1.5 kW	
Full Load Current	2.4 Amps/380V		3.5 Amps/380 V	
Dimension Unit	3.65 x 3.65 x 1m	4.9 x 4.9 x 1m	6.1 x 6.1 x 1 m	7.3 x 7.3 x 1 m
Dimension Packaging	Blade Carton	200 x 42 x 45 cm	250 x 42 x 45 cm	310 x 42 x 45 cm
	Motor Carton	95 x 83 x 52 cm	95 x 83 x 52 cm	95 x 83 x 52 cm

INDUSTRIAL FAN

HIGH VOLUME LOW SPEED FAN (HVLS)

Features :

- High quality material
- Quiet and efficient
- Super wide coverage area
- Natural breeze
- Easy to assemble



*"All the time
There exists a piece of brilliant mind
Expecting to develop a mega fan"*


**STOCK
BY REQUEST**

BYE

Traditional Industrial Reduction Gearbox

- Bye!** Substantial maintenance
- Bye!** Intensive Noises
- Bye!** Heavy volume
- Bye!** High Weight

PMSM (Permanent Magnet Synchronous Motor) is now available

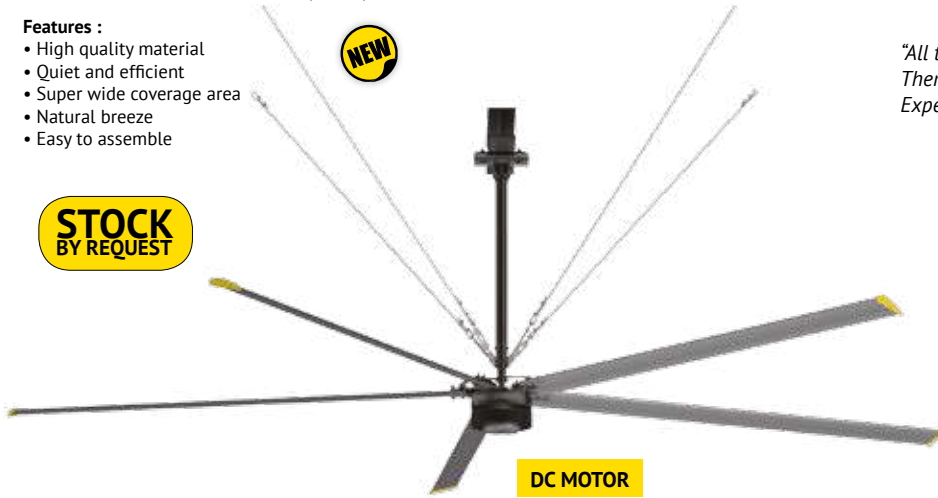

DC MOTOR



More powerful



Totally free of maintenance



More ingenious



Fewer noises

PERMANENT MAGNET SYNCHRONOUS MOTOR

PMSM is an electromagnetic device that is produced by a permanent magnet as a medium for the conversion of mechanical energy and electromagnetic energy to each other.

In addition, PMSM Permanent magnet synchronous brushless direct drive motor has the characteristics of high control accuracy, high torque density, good torque balance, low noise, small volume, high efficiency, high power factor, low temperature rise and so on.




Article No.	10209390	10216584	10216585	10216586
Description	Industrial Ceiling Fan 4.9M PMSM	Industrial Ceiling Fan 5.5M PMSM	Industrial Ceiling Fan 6.1M PMSM	Industrial Ceiling Fan 7.3M PMSM
Specification				
Technical Specification	16ft (4.9m)	18ft (5.5m)	20ft (6.1m)	24ft (7.3 m)
Full Load	12650m ³ /min	13350m ³ /min	13750m ³ /min	14800m ³ /min
Speed Range	5-75 RPM	5-70 RPM	5-62 RPM	5-57 RPM
Weight of Fan's Main Structure	106 kg	114 kg	120 kg	135 kg
Maximum Motor Power	1.8 kW			
Full Load Current	8 Amps/220V			
Dimension Unit	4.9 x 4.9 x 1 m	5.5 x 5.5 x 1 m	6.1 x 6.1 x 1 m	7.3 x 7.3 x 1 m
Dimension Packaging	Blade Carton	250 x 42 x 45 cm		370 x 42 x 45 cm
	Motor Carton	95 x 83 x 62 cm		



HIGH VOLUME LOW SPEED PORTABLE FAN HVLS



Airmove Wind Speed Explanation

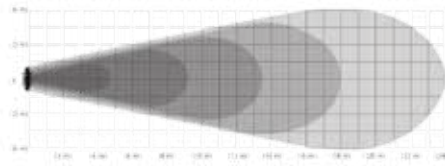

- The wind speed in every area is different. The shadow parts show the cooling area of the fan. The darker the shadow is, the faster the speed is.
- The air blowing distance is up to 24m, over a whole basketball court. Within the distance of 24m, the speed decreases from 7m/s to 0.9m/s (the longer, the slower)
- The data is obtained at the max speed of motor. The motor is stepless speed control, the speed range is 0-220rpm/min.

Features :


- Super large air volume
- Move easily
- Energy saving
- Quiet & low noise
- Stepless speed control
- Waterproof and dustproof
- Modularization installation

Article No.	10208263
Description	Industrial Portable Fan HVLS
Specification	
Max Speed	220RPM
Motor Type	BLDC motor
Motor Power	0.4 kW/220V/ 1P
Full Load Current	1.8A
Sound Level	43 dBA
Protection Level	IP55
Dimension (mm)	2190 x 2000 x 748
Weight (kg)	213

FAN

Features 10042068, 10078501, 285923, 285919, 285922 and 241678:

- Low power for saving cost
- Steel and powder coating finish
- 3 Speed Control

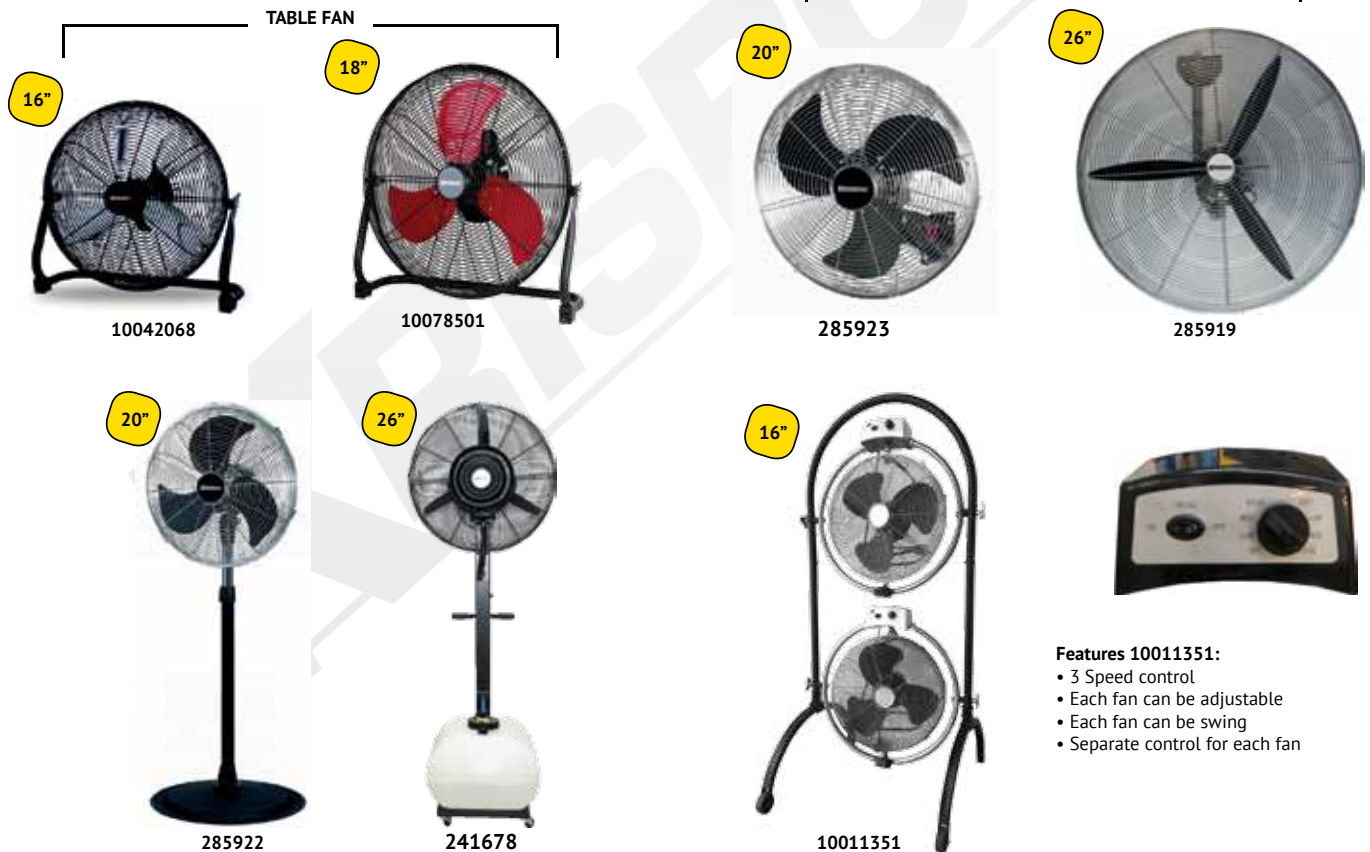

Article No.	Description	Voltage (V/Hz)	Power (w)	Color	Dimension (cm)			Weight (kg)
					Wide	Length	Height	
10042068	Table Fan 16inch	220/50	80	Black, Silver	55	22	55	4.4
10078501	Industrial Table Fan Krisbow 18"		111	Black, Red	190	585	560	5
285923	Wall Industrial Fan 20 inch		145	Black, Silver	57	28	60	7
285919	Wall Industrial Fan 26 inch		187	Black	73	11	73	7.9
285922	Pedestal Industrial Fan 20 inch		145	Black, Silver	58	33	59	10
241678	Mobile Humidifier 26 inch		230	Black	53	47	46	9.6
10011351	Industrial Double Fan 16"		90	Silver	450	630	590	16

Features 10011351:

- 3 Speed control
- Each fan can be adjustable
- Each fan can be swing
- Separate control for each fan

DEHUMIDIFIER

85L



- Benefit :**
- Control moisture level
 - Reduces pest related problems
 - Mold prevention
 - Improves comfort
- Features :**
- Electronic control
 - LED display with push-button
 - Rotary compressor
 - Big and stable wheel
 - Big metal handle
 - Washable air filter
 - Removable water pump
 - Quick water pipe connection
 - Vent hose can be connected
 - Simplified operation

Article No.	10161024
Description	Dehumidifier 85L f/Industrial Fix Wheel
Specification	
Dehumidifying Capacity	85L/day (30C RH 80%) 50L/day (27C RH 60%)
Power Supply	220-240V/50 Hz
Power Consumption	990 W
Applied Area	85-170 m2
Air Volume	700 m3/H
Noise Level	58 dB
Operating Temperature	5-35 C
Net Weight	45 kg
Gross Weight	49 kg
Product Size (WxDxH)	530 x 515 x 830 mm
Packing Size (WxDxH)	610x 580 x 870 mm

105L



- Features :**
- Electronic control
 - LED display with push-button
 - Rotary compressor
 - Easily move with caster
 - Washable air filter

Article No.	10161025
Description	Dehumidifier 105L f/Industry Swivel Wheel
Specification	
Dehumidifying Capacity	105L/day (30C RH 80%) 65L/day (27C RH 60%)
Power Supply	220-240V/50 Hz
Power Consumption	1160 W
Applied Area	105-210 m2
Air Volume	520 m3/H
Noise Level	60 dB
Operating Temperature	5-35 C
Net Weight	47 kg
Gross Weight	53 kg
Product Size (WxDxH)	540x410x990 mm
Packing Size (WxDxH)	610x490x1100 mm

LED BULB



WARM WHITE

COOL WHITE

LIFETIME 15,000 hours

E27

220° Beam Angle

Article No.	Description	Rated Power	Lumen LED
10049491	Bulb LED Krisbow Eco 3W Warm White	3W	250lm
10049490	Bulb LED Krisbow Eco 3W Cool White		
10049503	Bulb LED Krisbow Eco 5W Warm White	5W	400lm
10049484	Bulb LED Krisbow Eco 7W Cool White	7W	600lm
10049487	Bulb LED Krisbow Eco 9W Warm White	9W	806lm
10049485	Bulb LED Krisbow Eco 9W Cool White		
10049489	Bulb LED Krisbow Eco 11W Warm White	11W	1000lm
10049488	Bulb LED Krisbow Eco 11W Cool White		

FLASH LIGHT 9 LED



- Features:**
- Reinforced ABS plastic housing
 - 9 super bright LED
 - Easy carrying strong hand strap
 - ON/OFF switch at the rear

Article No.	10108013	10108014	10108015
Description	LED Flashlight Mini 20 LM, 3xAA Blue	LED Flashlight Mini 20 LM, 3xAA Pink	LED Flashlight Mini 20 LM, 3xAA Turquoise
Specification			
Light Source	1 LED 0.5W		
Luminous Flux (lm)	20		
Distance (m)	20		
Run Time (hours)	4		
Battery	3AAA		
Accessories	3AAA batteries included		
Dimension unit (cm)	10 x 3.2 x 3.2		
Weight Nett (g)	90		

FLASH LIGHT 9 LED



Features:

- LED bulbs for super brightness, lightweight & tough plastic body
- LED never need replacing

Article No.	10108011
Description	LED Flashlight 25LM, 2xAA Light Weight
Specification	
Light Source	9 LED 1W
Luminous Flux (lm)	25
Distance (m)	20
Run Time (hours)	3
Battery	2AA
Accessories	2AA batteries included
Dimension unit (cm)	11 x 8.5 x 5.8
Weight Nett (g)	100

ALUMINUM FLASHLIGHT



Features:

- Utilizing CREE LED bulb technology
- Compact aluminum casing
- Lighting modes - high / low / strobe

Article No.	10108198
Description	LED Flashlight 150LM, 3xAAA Zoomable Aluminum
Specification	
Light Source	1 CREE LED 3W
Luminous Flux (lm)	150
Distance (m)	100
Run Time (hours)	3
Battery	3AAA
Accessories	3AAA batteries included
Dimension unit (cm)	20 x 6.5 x 4
Weight Nett (g)	190



Features:

- Utilizing LED bulb technology
- Compact aluminum casing

Article No.	10108017
Description	LED Flashlight 40LM, 2xAAA Pocket Aluminium
Specification	
Light Source	1 LED 1W
Luminous Flux (lm)	40
Distance (m)	30
Run Time (hours)	2.5
Battery	2AAA
Accessories	2AAA batteries included
Dimension unit (cm)	14 x 2 x 2
Weight Nett (g)	70

ALUMINUM FLASHLIGHT



Features:

- Convenient spotlight plus retractable flashlight
- Retractable COB worklight
- Magnetic base easily attaches to metal surface



Features:

- 3 modes
- Extremely durable aluminum body
- Use for emergencies and self-defense

Article No.	10108199
Description	LED Flashlight 150/300 LM, 4xAAA Aluminum
Specification	
Light Source	LED 3W + COB 3W
Luminous Flux (lm)	150 / 300
Distance (m)	10 / 100
Run Time (hours)	1.5
Battery	4AAA
Accessories	4AAA batteries included
Dimension unit (cm)	20 x 6.5 x 4
Weight Nett (g)	190

Article No.	10108188
Description	LED Flashlight 300LM, 4xAA Batteries Aluminium
Specification	
Light Source	1 LED 5W
Luminous Flux (lm)	300
Distance (m)	180
Run Time (hours)	3
Battery	4AA
Accessories	4AA batteries included
Dimension unit (cm)	43 x 5 x 5
Weight Nett (g)	450

ALUMINUM FLASHLIGHT



Features:

- Durable anodized aluminum
- Secure grip design
- Adjustable focus
- Durable metal clip for attaching
- Easy one handed ON/OFF

Article No.	10208217
Description	LED Flashlight 50LM, 1xAA, 15V with Clip Aluminium
Specification	
Light Source	1 LED 3W
Luminous Flux (lm)	50
Distance (m)	30
Run Time (hours)	1
Battery	1AA
Accessories	1AA battery included
Dimension unit (cm)	10 x 3.5 x 3.5
Weight Nett (g)	90

HEADLIGHT



- Features:**
- 3 lighting modes - high / low / strobe
 - Easy push button ON/OFF
 - Adjustable headband
 - Pivoting directional light



- Features:**
- Pivoting head and adjustable headband
 - 3W white LED with 2 red LED for super brightness

Article No.	10108189
Description	LED Headlight 150LM,3xAAA and 3 Light Mode
Specification	
Light Source	1 LED 3W
Luminous Flux (lm)	150
Distance (m)	100
Run Time (hours)	2
Battery	3AAA
Accessories	3AAA batteries included
Dimension unit (cm)	6 x 5 x 5
Weight Nett (g)	70

Article No.	10108190
Description	LED Headlight 120LM,3xAAA Adjustable Headband
Specification	
Light Source	3 LED 3W
Luminous Flux (lm)	120
Distance (m)	60
Run Time (hours)	3
Battery	3AAA
Accessories	3AAA batteries included
Dimension unit (cm)	6 x 5 x 5
Weight Nett (g)	70

COB WORKLIGHT



10108192

- Features 10108192:**
- Super bright LED aluminum flashlight
 - 3 modes: high, low and strobe
 - 2-in-1 worklight with magnetic swivel stand base and swivel hanging hook



10108193

- Features 10108193:**
- 3W COB worklight
 - New ergonomically designed shape for comfort grip
 - With hanging hook and magnet



10108194

- Features 10108194:**
- Use as flashlight or area light
 - Strong magnetic base
 - 360° hang hook

Article No.	10108192	10108193	10108194
Description	LED Worklight 120LM,3xAAA Swivel Stand	LED Worklight 200LM,3xAAA Hanging Hook	LED Worklight and Flashlight 200 and 60LM,3xAAA
Specification			
Light Source	COB LED 3W		
Luminous Flux (lm)	120	200	200 (camping light), 60 (flashlight)
Distance (m)	12	15	15 (camping light), 40 (flashlight)
Run Time (hours)	3	4	3 (camping light), 5 (flashlight)
Battery	3AAA	3AA	
Accessories	3AAA batteries included	3AA batteries included	
Dimension unit (cm)	22 x 19 x 21	20 x 6.5 x 4	
Weight Nett (g)	500	220	

NIGHT LIGHT and CAMPING LANTERN



10108191



10108197

- Features:**
- Motion sensor (20 sec for auto off) (10108191)
 - Ideal for camping and emergencies (10108197)
 - 3 modes: low, high, strobe (10108197)

Article No.	10108191	10108197
Description	LED Push Light 10LM, 3xAAA Motion Sensor	Camping Lantern 250LM, 4xAA and 3Light Mode
Specification		
Light Source	9 LED 0.5W	3W
Luminous Flux (lm)	30	250
Distance (m)	3	10
Run Time (hours)	3.5	4
Battery	3AAA	4AA
Accessories	3AAA batteries included	4AA batteries included
Dimension unit (cm)	8 x 2 x 8	25 x 11 x 11
Weight Nett (g)	90	340

RECHARGEABLE SPOTLIGHT



10108195

- Features 10108195:**
- Rechargeable li-ion spotlight
 - Rubberized protection for extreme Durability
 - Lock on button



10108196

- Features 10108196:**
- Rechargeable li-ion spotlight
 - Rubberized protection for extreme Durability
 - Swivel handle

Article No.	10108195	10108196
Description	LED Flashlight 350 LM Rechargeable	LED Flashlight 200 LM Rechargeable
Specification		
Light Source	1 cree led 5W	1 cree led 3W
Luminous Flux (lm)	350	200
Distance (m)	350	380
Run Time (hours)	2	4.5
Battery	Rechargeable li-ion battery	
Accessories	USB charger + USB line	
Dimension unit (cm)	20 x 17 x 19	
Weight Nett (g)	500	

AREA WORKLIGHT



- Features:**
- Durable aluminum fixture
 - 360 Swivel handle for different angle use
 - 5-Ft-Cord

Article No.	10110699
Description	LED Worklight 1000 LM AC
Specification	
Light Source	9 LED , 13 W
Luminous Flux (lm)	1000
Distance (m)	40
Power (V/Hz)	220/50
Dimension unit (cm)	14 x 20 x 10
Weight Nett (g)	650



- Features:**
- 1. Durable aluminum fixture
 - 180 Swivel handle for different angle use
 - Mode:high,low
 - Rechargeable Li-ion battery include

Article No.	10110700
Description	LED Worklight 1000 LM Rechargeable
Specification	
Light Source	9 LED, 13 W
Luminous Flux (lm)	1000
Distance (m)	40/25
Run Time (hours)	2/4
Battery	LI-ION BATTERY
Accessories	charger + line 2 x 2600MAH batteries include
Dimension unit (cm)	14 x 20 x 10
Weight Nett (g)	650

AREA WORKLIGHT



- Features:**
- 1. Durable aluminum fixture
 - 360 Swivel handle for different angle use
 - 5-Ft-Cord
 - Rugged die-cast aluminum body

Article No.	10110701
Description	LED Worklight 2500 LM AC
Specification	
Light Source	30 LED, 42 W
Luminous Flux (LM)	2500 Lumen
Distance (m)	70
Power (V/Hz)	220/50
Dimension unit (cm)	28 x 10 x 27
Weight Nett (g)	1900



- Features:**
- Adjustable and extendable, up to 35" tall
 - Can be adjustable to any height between 21.26" and 35"
 - Durable heavy duty steel body

Article No.	10110702
Description	Tripod for LED Worklight
Specification	
Dimension unit (cm)	89 x 66 x 66
Weight Nett (g)	2.8

EXPLOSION PROOF FLASHLIGHT



Features:

- Uses Cree XP-E LED.
- Aluminum heat sink to enhance LED efficiency.
- Designed reflector for long range lighting.
- Tough and durable casing.
- High impact lens.
- Non-clip handle.
- Fastener prevents from opening torch in hazardous places.
- Valve design helps to hydrogen gas released.

CERTIFICATION & STANDARDS



CLASS I DIV 1 GRP ABCD
CLASS II DIV 1 GRP EFG
CLASS III
TEMP CODE: T4
FILE NUMBER E324236



Ⓜ II 1G Ex ia IIC T4
DEMKO 13 ATEX
1302999X

IECEX

Ex ia IIC T4 Ga IECEx
UL 13.0013X



Approved

REACH



Article No.	10177003	
Description	Explosion Proof Flashlight Handheld	
Specification	Low	High
Battery Size	4 x AA	
Light Source	Cree XP-E LED	
Mode	High/Low/Off	
Light Output	32 lm	133 lm
Beam Distance	110 m	1231 m
Run Time	69 hrs 10 mins	6hrs
IP Rating	IP67	
Dimension (mm)	174 x 47 x 47	
Weight (g)	115	



Features:

- Uses Cree XP-E LED.
- Two ways position clip.
- Fastener prevents from opening torch in hazardous places.
- Valve design helps to hydrogen gas released

Optional Accesories :



10177033

CERTIFICATION & STANDARDS



CLASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III
TEMP CODE: T4
FILE NUMBER:E324236



Ⓜ II 1G Ex ia IIC T4
DEMKO 13 ATEX
1112940X

IECEX

Ex ia IIC T4 Ga IECEx
UL 13.0008X



Approved

REACH



Article No.	10177004	
Description	Explosion Proof Flashlight with Clip	
Specification	Low	High
Battery Size	3 x C	
Light Source	Cree XP-E LED	
Mode	High/Low/Off	
Light Output	57lm	141lm
Beam Distance	154m	248m
Run Time	80hrs	42hrs 30mins
IP Rating	IP67	
Dimension (mm)	225 x 60 x 85	
Weight (g)	190	



Features:

- Safety penlight for use in Oil & Gas fields, Mine areas (meet ATEX M1 / M2 regulation), Ignitable Fiber area, Marine usage and other Hazardous locations
- Compact size for easy carry & holding
- Users high power CREE LED
- Water Proof
- Tough and durable casing
- Screw fastener for safety precautions
- Build-in gas release vent

CERTIFICATION & STANDARDS



CLASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III
TEMP CODE: T5
IP67
FILE NUMBER E324236



Ⓜ I M1 Ex ia I Ma
Ⓜ II 1G Ex ia IIC T5 Ga
DEMKO 16 ATEX
1661X

IECEX

Ex ia I Ma IECEx
Ex ia IIC T5 Ga IECEx
UL 16.0015X



Approved

REACH



Article No.	10177030
Description	Explosion Proof Pen Light
Specification	
Battery Size	2 X AAA
Light Source	Cree XP-G2 LED
Mode	ON/OFF
Light Output	64lm
Beam Distance	41m
Run Time	20hrs 40mins
IP Rating	IP67
Dimension (mm)	142 x 30 x 26
Weight (g)	41

EXPLOSION PROOF FLASHLIGHT



CERTIFICATION & STANDARDS



CLASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III
TEMP CODE: T4
IP67
FILE NUMBER E324236



Ⓜ II 1G Ex ia IIC T4 Ga IP67
DEMKO 14 ATEX
1354X

IECEX

Ex ia IIC T4 Ga IP67
IECEX UL 14.0059X



Approved



REACH

Features:

- Intrinsically safe for use in hazardous locations
- High and Low mode functions
- Uses high power CREE LED
- Focus and flood reflector
- Submersible in water
- Tough and durable casing
- Screw fastener for safety precautions
- Built-in gas release vent

Article No.	10177029	
Description	Explosion Proof Head Lamp	
Specification	Low	High
Battery Size	3 X AAA	
Light Source	Cree XP-G2 LED	
Mode	High / Low / Off	
Light Output	100lm	216lm
Beam Distance	75m	100m
Run Time	12hrs 12mins	5hrs 8mins
IP Rating	IP67	
Dimension (mm)	80 x 50 x 45	
Weight (g)	130	



CERTIFICATION & STANDARDS



LASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III
TEMP CODE: T4
IP54
FILE NUMBER:261379



Ⓜ I M1 Ex ia I Ma
Ⓜ II 1G Ex ia IIC T4 Ga
Sira 15ATEX2166X

IECEX

GAS;Ex ia IIC T4 Ga
MINING;Ex ia Ma
IECEX SIR 15.0062X



Approved



REACH

Features:

- Intrinsically safe for use in hazardous locations
- Angle head for use in chest pocket
- High and Low mode functions
- Uses high power CREE LED
- Tough and durable casing
- High efficient heatsink
- Screw fastener for safety precautions
- Built-in gas release vent

Article No.	10177005	
Description	Explosion Proof Flashlight Angle	
Specification	Low	High
Battery Size	4 X AA	
Light Source	Cree XP-G2 LED	
Mode	High / Low / Off	
Light Output	140lm	323lm
Beam Distance	184m	288m
Run Time	13hrs	6hrs 30mins
IP Rating	IP54	
Dimension (mm)	183 x 69 x 63	
Weight (g)	250	

EMERGENCY LIGHT



10033391

Features:

- A multifunction light
- With LED lamp provide maximum light
- Low consumption power
- Complete with rechargeable battery
- Made from quality material, ensure durability



10033394

Article No.	10033391	10033394
Description	Emergency Exit-Sign Double Face	Emergency Lamp Twin-Spot 5038R
Specification		
Lamp	Double (LED 12 x 0.1 W)	Double (LED 4 W)
Input Voltage (V/Hz)	AC 220-240 / 50-60	AC 220-240 / 50-60
Battery Type	Rechargeable Sealed Lead Acid Battery	Rechargeable ni-cd Battery
Charging Time	20-24 hours	20 hours
Running Hour	32 hours/single 12 hours/double	Always On Emergency time 2 hours
Dimension	271x80x300 mm	364x185x28 mm

CABLE REEL



- Features:**
- High quality plastic material
 - There is a frame to roll up the cable
 - Common schuko socket type
 - Over heat protection
 - Maximum 16A

Article No.	Description
10026633	Cable Reel 1mm x 5m
KW2000317	Cable Reel 1mm x 10m
KW2000318	Cable Reel 1mm x 15m
KW2000319	Cable Reel 1.5mm x 25m
KW2000320	Cable Reel 1.5mm x 50m

ELECTRICAL AND LIGHTING

- INDUSTRIAL FAN
- FAN
- DEHUMIDIFIER
- ELECTRICAL EQUIPMENT

