

KRISBOW®

ELECTRICAL & LIGHTING



SCAN

FOR OUR LATEST VIDEO



SCAN

FOR BROCHURE & CATALOG



SCAN

FOR OUR STORE LOCATION

FAN



TABLE FAN



18"

285918

WALL FAN



20"

285923

WALL FAN



26"

285919

PEDESTAL FAN



20"

285922

MISTY FAN



26"

10331834

DOUBLE FAN



16"

10456578

- Features :**
- Low power for saving cost
 - Steel and powder coating finish
 - 3 Speed Control

- Features 10456578 :**
- 3 Speed control
 - Each fan can be adjustable
 - Each fan can be swing
 - Separate control for each fan

Article No.	Description	Voltage (V/Hz)	Power (W)	Dimension (cm)			Weight (kg)
				Length	Wide	Height	
285918	Table Fan 18"	220/50	111	59	21.3	55.7	7
285923	Wall Industrial Fan 20"		145	28	57	60	8
285919	Wall Industrial Fan 26"		187	12	73	73	14
285922	Pedestal Industrial Fan 20"		145	33	58	59	11
10331834	Mistyfan 60L 26"		305	136	72	22	33
10456578	Industrial Double Fan 16"		90	71	38	61	18



INDUSTRIAL FAN

OSCILLATING DRUM FAN DIRECT-DRIVE



24"

Features :

- All metal construction
- 2 Speed air circulator fan
- Oscillating blade

Article No.	10349860
Description	Industrial Drum Fan 24" Oscillating
Specification	
Drum Dia. (inch/cm)	24 / 60
Power (W/V/Ph/Hz)	310 / 220-240 / 1 / 50
Flow Rate (RPM)	1440
Air Volume (CFM)	9150
Fan Movement	Oscillating
Dimension (cm)	78 x 33.5 x 77
Weight (kg)	20

DRUM FAN DIRECT-DRIVE



24"

10349858



36"

10349862

Features :

- All metal construction
- 2 Speed Air Circulator Fan
- Adjustable tilt drum

Article No.	10349858	10349862
Description	Industrial Drum Fan 24"	Industrial Drum Fan 36"
Specification		
Drum Dia. (inch/cm)	24 / 60	36 / 90
Power (W/V/Ph/Hz)	310 / 220-240 / 1 / 50	450 / 220-240 / 1 / 50
Flow Rate (RPM)	1530	910
Air Volume (CFM)	9230	10220
Motor Type	Direct Drive	Direct Drive
Dimension (cm)	74 x 24 x 75.5	105 x 32 x 107.5
Weight (kg)	20	31

DRUM FAN BELT-DRIVE



48"

10349864



60"

10349866

Features :

- All metal construction
- 2 Speed air circulator fan
- Belt drive

Article No.	10349864	10349866
Description	Industrial Drum Fan 48"	Industrial Drum Fan 60"
Specification		
Drum Dia. (inch/cm)	48 / 120	60 / 180
Power (W/V/Ph/Hz)	945 / 220-240 / 1 / 50	1050 / 220-240 / 1 / 50
Flow Rate (RPM)	480	465
Air Volume (CFM)	14450	22,100
Fan Movement	Fixed Angle	Fixed Angle
Dimension (cm)	126 x 38.5 x 129	160 x 61 x 174
Weight (kg)	48.5	60



INDUSTRIAL PEDESTAL DRUM FAN



10118132

10118134

Features:

- All metal construction
- 3 Speed air circulator Fan
- 3 Aluminium blade

Article No.	10118132	10118134
Description	Industrial Pedestal Drum Fan 20" 3B	Industrial Pedestal Drum Fan 30"
Specification		
Drum Dia. (inch/cm)	20h / 60	30 / 75
Power (W/V/Ph/Hz)	111 / 220-240 / 1 / 50	111 / 220-240 / 1 / 50
Flow Rate (RPM)	1450	1100
Air Volume (CFM)	3400	6630
Fan Movement	Oscilation	Vertical Tilt
Dimension (cm)	27 x 56 x 57	34 x 89 x 91
Weight (kg)	11.1	27

EXHAUST FAN



10407687

10407688

Features :

- Excellent air-flow rate
- Sturdy metal structure
- Heavy duty motor

Article No.	10407687	10407688
Model No.	JREF-20	JREF-24
Description	Industrial Exhaust Fan 20"	Industrial Exhaust Fan 24"
Specification		
No. of Blade	3	3
Propeller Diameter (inch)	20	24
speed	2	2
Motor Power (W/V/Ph/Hz)	550 / 220-240 / 1 / 50	560 / 220-240 / 1 / 50
Motor RPM	1736	1636
CFM	4500	7000
Bearing type	ball	ball



DEHUMIDIFIER


Features:

- Electronic control
- Automatic purge
- Washable air filter

Article No.	10161024
Model No.	JRDH700
Description	Dehumidifier 85L Fix Wheel
Specification	
Dehumidifying Capacity	85L/day (30C RH 80%) 50L/day (27C RH 60%)
Power Consumption (W/V/Ph/Hz)	990 / 220-240 / 1 / 50
Applied Area (m2)	85-170
Air Volume (m3/H)	700
Operating Temperature (°C)	5-35
Dimension (cm)	60 x 57 x 88
Weight (kg)	49


Features:

- Electronic control
- Easily move with caster
- Washable air filter

Article No.	10161025
Model No.	JRDH520
Description	Dehumidifier 105L Swivel Wheel
Specification	
Dehumidifying Capacity	105L/day (30C RH 80%) 65L/day (27C RH 60%)
Power Consumption (W/V/Ph/Hz)	1160 / 220-240 / 1 / 50
Applied Area (m²)	105-210
Air Volume (m³/H)	520
Operating Temperature (°C)	5-35
Dimension (cm)	61 x 49 x 110
Weight (kg)	53

FLASHLIGHT


Features:

- LED bulbs for super brightness, lightweight & tough plastic body
- LED never need replacing

Article No.	10108011
Model No.	JRF25
Description	LED Flashlight 25LM, 2xAA Light Weight
Specification	
Light Source.	9 LED 1W
Luminous Flux (lm)	25
Distance (m)	20
Run Time (hours)	3
Battery	2AA
Dimension unit (cm)	11 x 8.5 x 5.8
Weight Nett (g)	100


Features:

- Rubberized case for impact resistant & water-proof
- High intensity LED bulb

Article No.	10108012
Model No.	JRF60WP
Description	Led Flashlight 60 Lm 2xd Drop & Waterproof
Specification	
Light Source.	1 LED 1W
Luminous Flux (lm)	60
Distance (m)	20
Run Time (hours)	7
Battery	4AA Batteries Included
Dimension unit (cm)	23 x 5.5 x 5.5
Weight Nett (g)	450

ALUMINIUM FLASHLIGHT


Features:

- Utilizing CREE LED bulb technology
- Compact aluminum casing
- Lighting modes - high / low / strobe

Article No.	10108198
Model No.	JRFL150AL
Description	LED Flashlight 150LM, 3xAAA Zoomable Aluminum
Specification	
Light Source.	1 CREE LED 3W
Luminous Flux (lm)	150
Distance (m)	100
Run Time (hours)	3
Battery	3 AAA
Dimension unit (cm)	20 x 6.5 x 4
Weight Nett (g)	190

Features:

- Utilizing LED bulb technology
- Compact aluminum casing



Article No.	10108017
Model No.	JRF40AL
Description	LED Flashlight 40LM, 2xAAA Pocket Aluminium
Specification	
Light Source.	1 CREE LED 1W
Luminous Flux (lm)	40
Distance (m)	30
Run Time (hours)	2.5
Battery	2 AAA
Dimension unit (cm)	14 x 2 x 2
Weight Nett (g)	70

ALUMINIUM FLASHLIGHT

Features:

- Convenient spotlight plus retractable flashlight
- Retractable COB worklight
- Magnetic base easily attaches to metal surface

Article No.	10108199
Model No.	JRWF300AL
Description	LED Flashlight 150/300 LM, 4xAAA Aluminum
Specification	
Light Source.	LED 3W + COB 3W
Luminous Flux (lm)	150 / 300
Distance (m)	10 / 100
Run Time (hours)	1.5
Battery	4AAA
Accessories	4AAA batteries included
Dimension unit (cm)	20 x 6.5 x 4
Weight Nett (g)	190


Features:

- 3 modes
- Extremely durable aluminum body
- Use for emergencies and self-defense

Article No.	10108188
Model No.	JRF50AL
Description	LED Flashlight 50LM, 1xAA, 15V with Clip Aluminum
Specification	
Light Source	1 LED 5W
Luminous Flux (lm)	300
Distance (m)	180
Run Time (hours)	3
Battery	4AA
Accessories	4AA batteries included
Dimension unit (cm)	43 x 5 x 5
Weight Nett (g)	450


Features:

- Adjustable focus
- Durable metal clip for attaching
- Easy one handed ON/OFF

Article No.	10208217
Model No.	JRF50AL
Description	LED Flashlight 50LM, 1xAA, 15V with Clip Aluminum
Specification	
Light Source.	1 LED 3W
Luminous Flux (lm)	50
Distance (m)	30
Run Time (hours)	1
Battery	1AA
Accessories	1AA batteries included
Dimension unit (cm)	10 x 3.5 x 3.5
Weight Nett (g)	90


Features:

- Strong aluminium body for durability
- Super bright LED up to 350 Lumens
- Upgraded LED with 1 osram chip

Article No.	10404759
Model No.	JRFL350AL
Description	Led Flashlight FL - 350
Specification	
Light Source.	1 LED Osram Chip
Luminous Flux (lm)	350
Distance (m)	200
Run Time (hours)	6
Battery	3AA
Accessories	3AA batteries included
Dimension unit (cm)	25 x 11 x 6
Weight Nett (g)	347

HEADLIGHT



Features:

- Pivoting head and adjustable headband
- 3W white LED with 2 red LED for super brightness

Article No.	10108190
Model No.	JRH120
Description	LED Headlight 120LM,3xAAA Adjustable Headband
Specification	
Light Source.	3 LED 3W
Luminous Flux (lm)	120
Distance (m)	60
Run Time (hours)	3
Battery	3AAA
Accessories	3AAA batteries included
Dimension unit (cm)	6 x 5 x 5
Weight Nett (g)	70

WORKLIGHT



NIGHT LIGHT and CAMPING LANTERN



10108191



10108197

Features:

- Motion sensor (20 sec for auto off) (10108191)
- Ideal for camping and emergencies (10108197)
- 3 modes: low, high, strobe (10108197)

Article No.	10108191	10108197
Model No.	JRP10MS	JRCL300AL
Description	LED Push Light 10LM, 3xAAA Motion Sensor	Camping Lantern 250LM, 4xAA and 3Light Mode
Specification		
Light Source.	9 LED 0.5W	3W
Luminous Flux (lm)	30	250
Distance (m)	3	10
Run Time (hours)	3.5	4
Battery	3AAA	4AA
Accessories	3AAA batteries included	4AA batteries included
Dimension unit (cm)	8 x 2 x 8	25 x 11 x 11
Weight Nett (g)	90	340

WORKLIGHT



10108192

Features 10108192 :

- Super bright LED aluminum flashlight
- 3 modes: high, low and strobe
- 2-in-1 worklight with magnetic swivel stand base and swivel hanging hook



10108193

Features 10108193 :

- 3W COB worklight
- New ergonomically designed shape for comfort grip
- With hanging hook and magnet



10108194

Features 10108194 :

- Use as flashlight or area light
- Strong magnetic base
- 360° hang hook

Article No.	10108192	10108193	10108194
Model No.	JRW120M	JRW200M	JRWF200M
Description	LED Worklight 120LM, 3xAAA Swivel Stand	LED Worklight 200LM, 3xAA Hanging Hook	LED Worklight and Flashlight 200 and 60LM, 3xAA
Specification			
Light Source.	COB LED 3W		
Luminous Flux (lm)	120	200	200 (camping light), 60 (flashlight)
Distance (m)	12	15	15 (camping light), 40 (flashlight)
Run Time (hours)	3	4	(camping light), 5 (flashlight)
Battery	3AAA	3AA	
Accessories	3AAA batteries included	3AA batteries included	
Dimension unit (cm)	22 x 19 x 21	20 x 6.5 x 4	
Weight Nett (g)	500	220	

WORKLIGHT



Features:

- Durable aluminum fixture
- 360 Swivel handle for different angle use
- 5-Ft-Cord

Article No.	10110699
Model No.	JRW1000
Description	LED Worklight 1000 LM AC
Specification	
Light Source.	9 LED , 13 W
Luminous Flux (lm)	1000
Distance (m)	40
Power (V/Hz)	220/50
Dimension unit (cm)	14 x 20 x 10
Weight Nett (g)	650
Dimension unit (cm)	11 x 21 x 15
Weight Nett (g)	70



Features:

- 180 Swivel handle for different angle use
- Mode:high,low
- Rechargeble Li-ion battery Include

Article No.	10110700
Model No.	JRW1000R
Description	LED Worklight 1000 LM Rechargeable
Specification	
Light Source.	9 LED , 13 W
Luminous Flux (lm)	1000
Distance (m)	40/25
Battery	LI-ION BATTERY
Run Time (hours)	2/ 4
Accessories	charger + line 2 x 2600MAH batteries include
Dimension unit (cm)	14 x 20 x 10
Weight Nett (g)	650



Features:

- Durable aluminum fixture
- 360 Swivel handle for different angle use
- Rugged die-cast aluminum body

Article No.	10110701
Model No.	JRW2500
Description	LED Worklight 2500 LM AC
Specification	
Light Source.	30 LED , 42 W
Luminous Flux (lm)	2500
Distance (m)	70
Power (V/Hz)	220/50
Dimension unit (cm)	28 x 10 x 27
Weight Nett (g)	1900

TRIPOD



Features:

- Adjustable and extendable, up to 35" tall
- Can be adjustable to any height between 21.26" and 35"
- Durable heavy duty steel body

Article No.	10110702
Description	Tripod for LED Worklight
Specification	
Dimension unit (cm)	89 x 66 x 66
Weight Nett (g)	2.8

RECHARGEABLE SPOTLIGHT



- Features:**
- Rechargeable li-ion spotlight
 - Rubberized protection for extreme durability
 - Lock on button



- Features:**
- Rechargeable li-ion spotlight
 - Rubberized protection for extreme durability
 - Swivel handle

Article No.	10108195
Model No.	JRF350R
Description	LED Flashlight 350 LM Rechargeable
Specification	
Light Source.	1 cree led 5W
Luminous Flux (lm)	350
Distance (m)	350
Run Time (hours)	2
Battery	Rechargeable li-ion battery
Accessories	USB charger + USB line
Dimension unit (cm)	20 x 17 x 19
Weight Nett (g)	500

Article No.	10108196
Model No.	JRF200R
Description	LED Flashlight 200 LM Rechargeable
Specification	
Light Source.	1 cree led 3W
Luminous Flux (lm)	200
Distance (m)	380
Run Time (hours)	4.5
Battery	Rechargeable li-ion battery
Accessories	USB charger + USB line
Dimension unit (cm)	20 x 17 x 19
Weight Nett (g)	500

EXPLOSION PROOF FLASHLIGHT



Optional Accessories :



10177033

CERTIFICATION & STANDARDS



TEMP CODE: T4
FILE NUMBER E324256



Ex II 1G Ex ia IIC T4
DEMRO 13 ATEX
1302999X



Ex ia IIC T4 Ga
UL 13.0013X



CERTIFICATION & STANDARDS



TEMP CODE: T4
FILE NUMBER E324256



Ex II 1G Ex ia IIC T4
DEMRO 13 ATEX
1112940X



Ex ia IIC T4 Ga
IECEX UL 13.0008X



- Features:**
- Uses Cree XP-E LED.
 - Tough and durable casing.
 - Fastener prevents from opening torch in hazardous places.

Article No.	10177003	
Model No.	JRF133EX	
Description	Explosion Proof Flashlight Handheld	
Specification	Low	High
Battery Size	4 X AA (Battery not included)	
Light Source.	Cree XP-E LED	
Mode	High / Low / Off	
Light Output (lm)	32	133
Beam Distance (m)	110	1231
Run Time (hours / mins)	9 / 10	6
IP Rating	IP67	
Dimension unit (mm)	174 x 47 x 47	
Weight Nett (g)	115	

- Features:**
- Uses Cree XP-E LED.
 - Two ways position clip.
 - Valve design helps to hydrogen gas released

Article No.	10177004	
Model No.	JRH141CEX	
Description	Explosion Proof Flashlight with Clip	
Specification	Low	High
Battery Size	3 X C (Battery not included)	
Light Source.	Cree XP-E LED	
Mode	High / Low / Off	
Light Output (lm)	57	141
Beam Distance (m)	154	248
Run Time (hours / mins)	80	42 / 30
IP Rating	IP67	
Dimension unit (mm)	225 x 60 x 85	
Weight Nett (g)	190	

EXPLOSION PROOF FLASHLIGHT



- Features:**
- Users high power CREE LED
 - Water Proof
 - Build-in gas release vent

Article No.	10177030
Model No.	JRF64CEX
Description	Explosion Proof Pen Light
Specification	
Battery Size	2 X AAA (Battery not included)
Light Source.	Cree XP-G2 LED
Mode	ON/OFF
Light Output (lm)	64
Beam Distance (m)	41
Run Time (hours / mins)	20 / 40
IP Rating	IP67
Dimension unit (mm)	142 x 30 x 26
Weight Nett (g)	41

CERTIFICATION & STANDARDS



CLASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III

TEMP CODE: T5
IP67
FILE NUMBER E324236



Ⓢ I M1 Ex ia I Ma
Ⓢ II 1G Ex ia IIC T5 Ga
DEMKO 16 ATEX
1661X

IECEX

Ex ia I Ma
Ex ia IIC T5 Ga
IECEX UL 16.0015X



REACH

Approved



- Features:**
- Uses high power CREE LED
 - High and Low mode functions
 - Submersible in water

Article No.	10177029	
Model No.	JRH216EX	
Description	Explosion Proof Head Lamp	
Specification	Low	High
Battery Size	3 X AAA (Battery not included)	
Light Source.	Cree XP-G2 LED	
Mode	High / Low / Off	
Light Output (lm)	100	216
Beam Distance (m)	75	100
Run Time (hours / mins)	12 / 12	5 / 8
IP Rating	IP67	
Dimension unit (mm)	80 x 50 x 45	
Weight Nett (g)	130	

CERTIFICATION & STANDARDS



CLASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III

TEMP CODE: T4
IP67
FILE NUMBER E324236



Ⓢ II 1G Ex ia IIC T4 Ga IP67
DEMKO 14 ATEX
1354X

IECEX

Ex ia IIC T4 Ga IP67
IECEX UL 14.0059X



REACH

Approved



- Features:**
- Uses high power CREE LED
 - Tough and durable casing
 - High and Low mode functions

Article No.	10177005	
Model No.	JRF323AEX	
Description	Explosion Proof Flashlight Angle	
Specification	Low	High
Battery Size	4 X AA (Battery not included)	
Light Source.	Cree XP-G2 LED	
Mode	High / Low / Off	
Light Output (lm)	140	323
Beam Distance (m)	184	288
Run Time (hours / mins)	13	6 / 30
IP Rating	IP54	
Dimension unit (mm)	183 x 69 x 63	
Weight Nett (g)	250	

CERTIFICATION & STANDARDS



LASS I DIV 1&2 GRP ABCD
CLASS II DIV 1&2 GRP EFG
CLASS III

TEMP CODE: T4
IP54
FILE NUMBER:261379



Ⓢ I M1 Ex ia I Ma
Ⓢ II 1G Ex ia IIC T4 Ga
Sira 15ATEX2166X

IECEX

GAS:Ex ia IIC T4 Ga
MINING:Ex ia Ma
IECEX SIR 15.0062X



REACH

Approved



EMERGENCY LIGHT & CABLE REEL



EMERGENCY LIGHT



10033391

Features:

- Low consumption power
- Complete with rechargeable battery
- Made from quality material, ensure durability



10033394

Article No.	10033391	10033394
Description	Emergency Exit-Sign Double Face	Emergency Lamp Twin-Spot 5038R
Specification		
Lamp	Double (LED 12 x 0.1 W)	Double (LED 4 W)
Input Voltage (V/Hz)	AC 220-240 / 50-60	AC 220-240 / 50-60
Battery Type	Rechargeable Sealed Lead Acid Battery	Rechargeable ni-cd Battery
Charging Time (hours)	20-24	20
Running Hour	32 hours / single 12 hours / double	Always On Emergency time 2 hours
Dimension (mm)	271 x 80 x 300	364 x 50 x 185

CABLE REEL



10026633



KW2000317



KW2000318



KW2000319



KW2000320

Features:

- High quality plastic material
- Over heat protection
- Maximum 16A
- Number of cables 4

Article No.	Model No.	Description	Dia. Cable	Length cable
10026633	-	Cable Reel 1mm x 5m	1 mm	5 m
KW2000317	-	Cable Reel 1mm x 10m	1 mm	10 m
KW2000318	-	Cable Reel 1mm x 15m	1 mm	15 m
KW2000319	-	Cable Reel 1.5mm x 25m	1.5 mm	25 m
KW2000320	-	Cable Reel 1.5mm x 50m	1.5 mm	50 m

STREET LIGHT LED



IEC 60598-2-3:2016



10443391



10443392



10443393

Features 10443391:

- Stable and optimal at 100-277Volt
- Efficient 110Lumen/ Watt
- Equip with over voltage protection

Features 10443392 & 10443393:

- Stable and optimal at 100-277Volt
- Efficient 110Lumen/ Watt
- With overvoltage protection anti yellowing Lens

*** Pole not included**

Article No.	10443391	10443392	10443393
Model No.	JRSL502	JRSL1002	JRSL1502
Description	Street Light LED 50W SMD 6500K	Street Light LED 100W SMD 6500K	Street Light LED 150W SMD 6500K
Specification			
Power (w)	50	100	150
Voltage (V/Hz)	100-277 / 60	100-277 / 60	100-277 / 60
Lumen	5500	11000	16500
Efficiency (Lumen/W)	110	110	110
Dimension (mm)	480 x 230 x 70	542 x 262 x 86	542 x 262 x 86
Weight (kg)	2.79	4.15	4.17



IEC 60598-2-3:2016



10472105



10472106



10472108

Features :

- High Quality Osram Chip
- High Quality LiFePO4 Battery
- Adjustable Mounting Arm

*** Pole not included**

Article No.	10472105	10472106	10472108
Model No.	JRSL501	JRSL1001	JRSL1501
Description	Street Light Solar 50W	Street Light Solar 100W	Street Light Solar 150W
Specification			
Power (w)	50	100	150
Lumen	3800	5700	11400
LED Chip	Osram 5050	osram 5050	osram 5050
CRI	70	70	70
CCT (k)	6500	6500	6500
Battery Type	LiFePO4	LiFePO4	LiFePO4
Battery Capacity (AH/V)	18 / 12.8	24 / 12.8	36 / 12.8
Battery Cycle	2000	2000	2000
Solar Panel Type	Double panel monocrystalline silikon	Double panel monocrystalline silikon	Double panel monocrystalline silikon
Solar Panel (Wp/V)	40 / 18	50 / 18	70 / 18
Body Material	High strength aluminum die casting		
Index Protection	IP 65	IP 65	IP 65
Dimension (cm)	82.4 x 35.8 x 13.6	96.8 x 35.8 x 13.6	143.6 x 35.8 x 13.6
Weight (kg)	10.5	12.5	17.3



SOLAR SYSTEM

PORTABLE POWER STATION 300W



Features :

- Advance lithium technology
- Battery capacity display
- 3 Convenient charging options

Article No.	10435231
Model No.	KRSP03
Description	Portable Power Station 300W
Specification	
Maximum Power (W)	300
Rated Power (W)	250
Output Voltage	AC 220v - 50hz, DC 5v (USBx3), 12v
Battery	Lithium 75000mAh 277.5WH
Input Voltage	Adaptor AC 110 - 220V (15vdc), Solar Panel 24VDC
Dimension Packaging (cm)	33 x 18 x 21
Weight (kg)	3.6

SOLAR PANEL FLEX 100W



Features :

- Foldable 100W portable solar panel
- Compact design
- Highly efficiency of solar power

Article No.	10435670
Unik Code	KRSPF01
Description	Solar Panel Flex 100W
Spesification	
Max Power (W)	100
Output Voltage DC	USB A 5V USB C 5V CABLE 24V
Current (A)	5
Dimension Packaging (cm)	55 x 6.5 x 60
Weight (kg)	4.16



HVLS FAN

HIGH VOLUME LOW SPEED FAN



Permanent magnet synchronous brushless direct drive motor



Aircraft grade aluminum



High frequency carrier technology to make the fan start smoothly and run noiselessly

Benefit :

- Corrosion resistant
- Energy saving
- Maintenance free
- Safety features
- Durable

Features :

- High quality material
- Quiet and efficient
- Super wide coverage area
- Natural breeze
- Long-life



Article No.	10468427
Model No.	JPHVLS203
Description	HVLS Ceiling Fan 7.3M PMSM
Specification	
Fan Diameter (m)	7.3
Power (W)	1300
Air Volume (m³/min)	13.100
Noise Level (dB)	40
Fan Speed (rpm)	52
Fan Weight (kg)	113
Full load current (Amps/V)	4.7 /220
Dimension Unit (m)	7.3 x 7.3 x 1



Permanent magnet synchronous brushless direct drive motor



Aircraft grade aluminum



High frequency carrier technology to make the fan start smoothly and run noiselessly

Benefit :

- Corrosion resistant
- Energy saving
- Maintenance free
- Safety features
- Durable

Features :

- High quality material
- Quiet and efficient
- Super wide coverage area
- Natural breeze
- Long-life
- More artistic

Article No.	10468802	10468803
Model No.	JPHVLS201	JPHVLS202
Description	HVLS Ceiling Fan 2M PMSM Motor	HVLS Ceiling Fan 3M PMSM Motor
Specification		
Fan Diameter (m)	2	3
Power (W)	130	200
Voltage/Freq (VAC/Hz)	220 / 50	220 / 50
Air Volume (m³/min)	3900	5100
Noise Level (dB)	40	40
Fan Speed (rpm)	150	110
Fan Weight (kg)	38	44
Full load current (Amps/V)	0.5 /220	1 /220




HIGH VOLUME LOW SPEED FAN PORTABLE



Features :

- Super large air volume
- Waterproof and dustproof
- Stepless speed control

Airmove Wind Speed Explanation

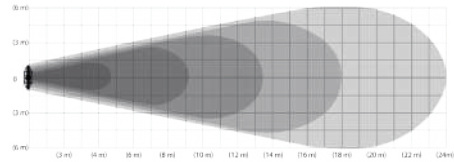

- The wind speed in every area is different. The shadow parts show the coolig area of the fan. The darker the shadow is , the faster the speed is.
- The air blowing distance is up to 24m, over a whole basketball court. Within the distance of 24m, the speed decreases from 7m/s to 0.9m/s (the longer, the slower)
- The data is obtained at the max speed of motor. The motor is stepless speed control, the speed range is 0-220rpm/min

Article No.	10208263
Description	Industrial Portable Fan HVLS
Specification	
Max Speed (RPM)	220
Motor Type	BLDC motor
Motor Power (kW/V/P)	0.4/220/1
Full Load Current (A)	1.8
Sound Level (Dba)	43
Protection Level	IP55
Dimension (mm)	2190 x 2000 x 748
Weight (kg)	213



Distributed by: